



Supervisory Switch for OS&Y Gate Valves

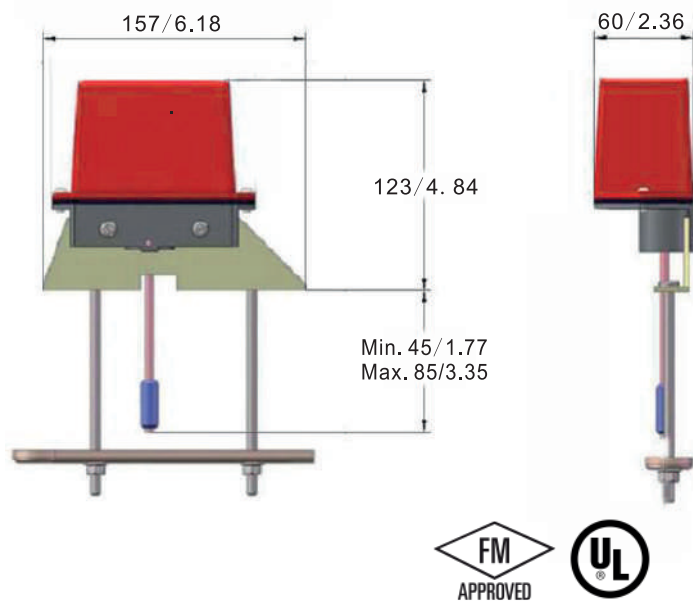

Weight	0.6 kg.
Enclosure	Cover: Die cast, Aluminium Alloy, AST M B85A04130.
	Finish: Red powder coat.
	Base: Die cast, Aluminium Alloy, AST M B85 A04130.
Cover Tamper	All parts have corrosion resistant finishes.
	Tamper resistant screws.
	Cover tamper switch available.
Contact Ratings	3 AMPS / 5 AMPS at 125/250 VAC.
	LF-SSOSY-1: one set of SPDT.
	LF-SSOSY-2: two sets of SPDT.
	LF-SSOSY-3: two sets of SPDT and cover tamper switch.
	10AMPS at 125/250 VAC.
Conduit Entrances	2.5 AMPS at 30 VDC resistive
	One knockouts and one hole for ½" conduit provided
Service Use	NFPA 13, 13D, 13R, 72
IP67	

Supervisory Switch for Indicator Post & Stop Valves

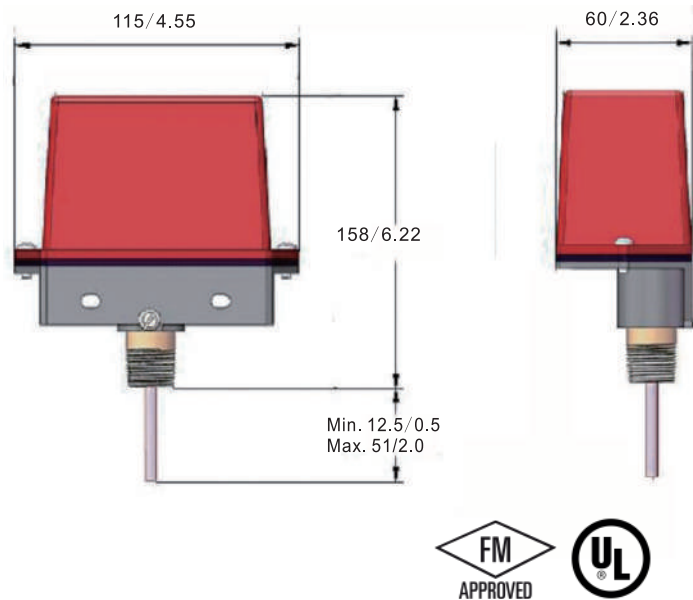

Weight	0.45 kg.
Enclosure	Cover: Die cast, Aluminum Alloy, AST M B85A04130
	Finish: Red powder coat.
	Base: Die cast, Aluminium Alloy, AST M B85 A04130.
Cover Tamper	All parts have corrosion resistant finishes.
	Tamper resistant screws.
	Cover tamper switch available.
Contact Ratings	3 AMPS / 5 AMPS at 125/250 VAC.
	LF-SIP-1: one set of SPDT.
	LF-SIP-2: two sets of SPDT.
	LF-SIP-3: two sets of SPDT and cover tamper switch.
	10AMPS at 125/250 VAC.
Conduit Entrances	2.5 AMPS at 30 VDC resistive
	One knockouts and one hole for ½" conduit provided
IP67	